



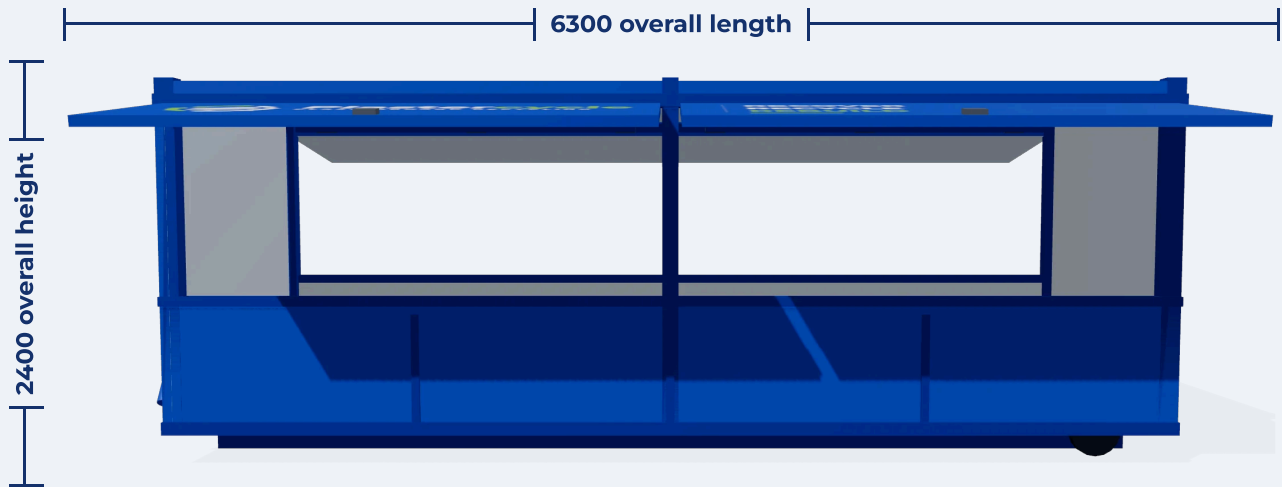

Side elevation, both loading panels open. Two top-hinged panels per side, about 1000 mm high, opening from the top and meeting in the middle. Overall width 2450 mm.




Hook end

A-frame and hook for standard hook-lift trucks.



Rear door

Full width, full height, solid. The load tips out here.

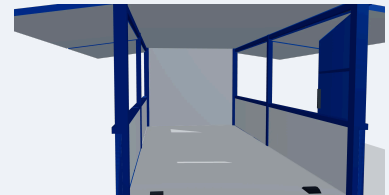

Inside

Sheeted smooth on every surface, so board doesn't catch when tipping.

Key dimensions

Overall length	6300 mm
Overall width	2450 mm
Overall height	2400 mm
Side panel height (from ground)	1000 mm
Side panels	2 per side, top-hinged, open in the middle
Rear door	Fully enclosed, solid door
Roof	Fully enclosed, weatherproof
Capacity	About 37 m ³

Construction

1. Hook-lift compatible to standard specification.
2. Fully enclosed and weatherproof, so the board stays dry.
3. Top-hinged side panels held open by gas struts.
4. All internal surfaces sheeted smooth — no ribs or beams for board to catch on.
5. Full-width, full-height rear door.
6. Heavy-duty steel, weather-resistant paint, Plastercycle blue.
7. For plasterboard collection at councils, transfer stations, builders and commercial sites.

Concept specification. Hook height and rail width are matched to the collection truck before fabrication.

Want one on your site?
plastercycle.com/book

nigel@recycle.au
0427 888 222